


Thermohygrometer + Luxmeter + UV-radiometer "TKA-PKM" (42) with verification




Main technical characteristics

| | |
|--|---------------------------------|
| Illumination measurement range | 10 ÷ 200,000 lx |
| Limits of the basic relative error of illumination measurements in the visible spectral range (380 ÷ 760) nm | ± 8.0% |
| Measurement range of irradiance in the spectral range UV-(A + B) (280 ÷ 400) nm | 10 ÷ 60,000 mW / m ² |

| | |
|---|---|
| Limits of permissible basic relative error of irradiance measurements | $\pm 10.0\%$ |
| Air temperature measurement range | $-30 \div +60$ ° C |
| Limits of the basic absolute error of temperature measurements in the range from +15 to +25 ° C | ± 0.2 ° C |
| Limits of additional absolute error of air temperature measurements at air temperature, ° C from -30 to -10 inclusive above -10 to +15 inclusive above +25 to +45 inclusive above +45 to +60 | ± 0.3 ° C ± 0.1 ° C ± 0.1 ° C ± 0.3 ° C |
| Measurement range of relative air humidity | 5 ÷ 98% |
| Limits of the basic absolute error of measurements of relative humidity in the range from +15 to +25 ° C | $\pm 3.0\%$ rel. ow. |
| Limits of permissible additional absolute error of relative humidity measurements when the air temperature changes by every 10 ° C in the range from -30 to +15 and over + 25 to +60 ° C | $\pm 3.0\%$ rel. ow. |
| The limits of the additional relative error of the device when measuring optical quantities, due to a change in the sensitivity of the photometric head when the air temperature in the measurement zone changes for every 10 ° C in the range from -30 to +15 and over + 25 to +60 ° C | $\pm 3.0\%$ |

The difference in the function of the relative spectral sensitivity of the photodetector of the Luxmeter is corrected by a system of light filters to match the function of the relative spectral luminous efficiency of monochromatic radiation for daytime vision $V(\lambda)$ according to GOST 8.332. 

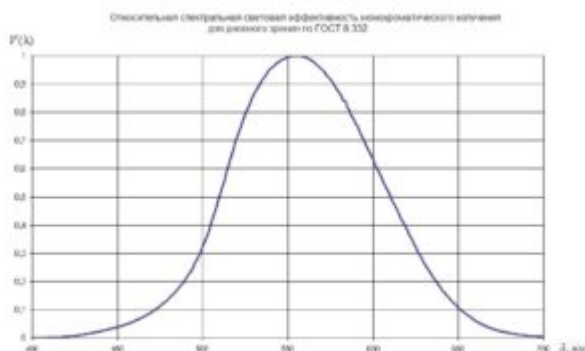

The effective reference plane of the Luxmeter coincides with the front plane of the cosine attachment of the photodetector.

dimensions

| | |
|---|------------------|
| – signal processing unit (no more) | 130 x 70 x 30 mm |
| – photometric head with a probe (no more) | 230 x 48 x 55 mm |
| Device weight (no more) | 0.3KG |
| Battery – Krona battery standard size | 9 in |

Combination of several measurement channels in one device at once. Possibility of measuring with one non-replaceable head. Compactness and ease of use.

