

## Luxmeter “TKA-LUX” with verification



### Main technical data and characteristics


Illumination measurement range	1.0 ÷ 200,000 lx
Limits of the basic relative error of illumination measurement	± 6.0%
Including the limits of the permissible relative error caused by the nonlinearity of the sensitivity of the device	± 2.0%
Including the limits of the permissible relative measurement error caused by the deviation of the relative spectral sensitivity from the relative spectral luminous efficiency	± 4.0%

Including the limits of the permissible relative error caused by the deviation of the calibration	$\pm 3.0\%$
—	—
Limits of permissible additional relative error caused by the spatial characteristic of the photometric head of the luxmeter at angles: 5 degrees 15 degrees 30 degrees 60 degrees	$\pm 0.5\%$ $\pm 1.0\%$ $\pm 5.0\%$ $\pm 15.0\%$
Limits of permissible additional relative error in measuring illumination caused by a change in ambient temperature for every $10^{\circ}\text{C}$	$\pm 3.0\%$
Liquid crystal display	$3\frac{1}{2}$ digit

### Overall dimensions of the device

Measuring unit (no more)	130 x 70 x 30 mm
Photometric head (no more)	$\varnothing 36 \times 22$ mm
Weight of the device with a power source (no more)	0.45 kg
Battery – Krona battery standard size	9 in

The difference in the function of the relative spectral sensitivity of the photodetector was corrected by a system of light filters to match the function of the relative spectral luminous efficiency of monochromatic radiation for daytime vision  $V(\lambda)$  in accordance with GOST 8.332.

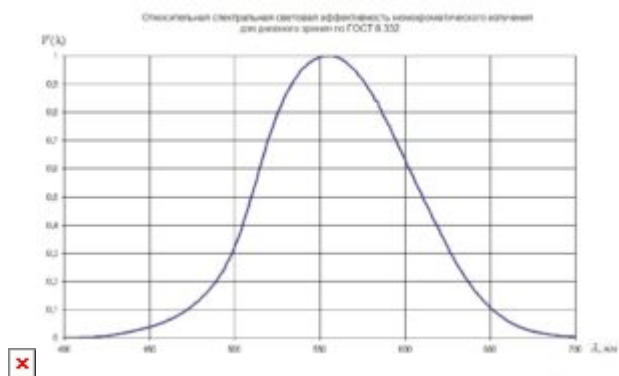

The effective reference plane of the Luxmeter coincides with the front plane of the cosine attachment of the photodetector.

### Significant advantages of the device Luxmeter “TKA-LUX” over analogues

The best in its characteristics domestic light meter, which is not inferior to world analogues, is reliable and easy to operate. Affordable price.